

SLOTTED TRACK & SEISMIC DRIFT TRACK



IAPMO
UNIFORM
ER 0283



 **SCAFCO**
Steel Stud Company

2015 INTERNATIONAL
BUILDING
CODE
IBC

www.SCAFCO.com

Product Application and Benefits

SCAFCO Slotted Track and Seismic Drift Track are the industry preferred systems for achieving head-of-wall deflection, drift, and fire rating for interior and exterior walls. SCAFCO Slotted Track has met the movement and cycling requirements of ANSI/UL 2079, and is UL classified for 1, 2, 3 & 4 hour fire ratings in head-of-wall fire-rated joint systems.

Details and information about each individual system can be found in the XHBN section of Volume 2 of the UL Fire Resistance Directory, or can be downloaded from www.SCAFCO.com.


- Allowable loads for wall heights
- Fire-rated deflection system
- Easy installation, reducing labor costs
- Integrates with traditional wall systems
- Provides positive attachment for wall strength
- UL Classified in over 120 approved fire rated systems
- Absorbs head-of-wall and floor extension or compression movement

Material Composition

- ASTM: A653 / A653 M
- 33, 43 mil: 33 ksi Yield Strength
- 54, 68, 97 mil: 50 ksi Yield Strength
- D20, 30EQD, 33EQD, 33EQS, 43EQS: 57 ksi Yield Strength
- D20, 30EQD: G-40 Galvanized Coating
- 33EQD, 33EQS, 43EQS, 33, 43, 54: G-60 Galvanized Coating
- 68, 97 mil: G-90 Galvanized Coating
- 33EQS minimum thickness for SDLT and DD Track

Nomenclature Example

6" Standard Slotted Leg Track, 2 1/2" Leg, 33EQS Material

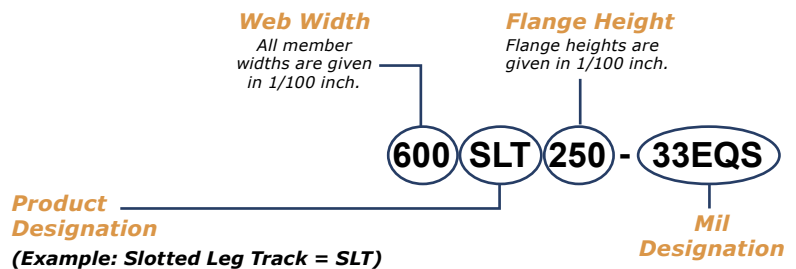

Use the following characters to designate the product:

SLT = Slotted Leg Track

SDLT = Slotted Deep Leg Track

D = Seismic Drift Track

DD = Seismic Deep Leg Drift Track



UL Head-of-Wall Joint Systems Numbers

3M COMPANY

HW-D-0020	HW-D-0021	HW-D-0029	HW-D-0031	HW-D-0101	HW-D-0111
HW-D-0134	HW-D-0170	HW-D-0173	HW-D-0205	HW-D-0265	HW-D-0517

A/D FIRE PROTECTION SYSTEMS INC.

HW-D-0467	HW-D-0468
-----------	-----------

FIRESTIK

HW-D-0420	HW-D-0421	HW-D-0453	HW-D-0455	HW-D-0461	HW-D-0462
HW-D-0463	HW-D-0475	HW-D-0476	HW-D-0477	HW-D-0480	

GRABBER CONSTRUCTION PRODUCTS INC.

HW-D-0532

HENKEL CORPORATION

HW-D-0183	HW-D-0341
-----------	-----------

HILTI INC.

HW-D-0042	HW-D-0045	HW-D-0046	HW-D-0049	HW-D-0076	HW-D-0077
HW-D-0082	HW-D-0083	HW-D-0084	HW-D-0085	HW-D-0087	HW-D-0089
HW-D-0106	HW-D-0154	HW-D-0184	HW-D-0190	HW-D-0218 ²	HW-D-0259 ²
HW-D-0264 ¹	HW-D-0313	HW-D-0322	HW-D-0388 ¹	HW-D-0538 ¹	HW-D-0539 ¹
HW-D-0541	HW-D-0542	HW-D-0564	HW-D-0569 ²	HW-D-0570 ²	HW-D-0571 ²
HW-D-0572	HW-D-0634 ¹	HW-D-0636 ¹	HW-D-0639 ¹	HW-D-0640 ²	

JOHNS MANVILLE INTERNATIONAL INC.

HW-D-0047	HW-D-0048	HW-D-0067	HW-D-0068	HW-D-0069	HW-D-0167
HW-D-0186	HW-D-0193	HW-D-0195	HW-D-0246	HW-D-0275	HW-D-0277
HW-D-0293					

PASSIVE FIRE PROTECTION PARTNERS (PFPP)

HW-D-0024	HW-D-0025	HW-D-0036	HW-D-0062	HW-D-0063	HW-D-0071
HW-D-0072	HW-D-0073	HW-D-0162	HW-D-0185	HW-D-0263	HW-D-0271
HW-D-0272	HW-D-0278				

RECTORSEAL

HW-D-0107	HW-D-0108	HW-D-0144	HW-D-0146	HW-D-0217	
-----------	-----------	-----------	-----------	-----------	--

Specified Technologies Inc. (STI)

HW-D-0548	HW-D-0088	HW-D-0003	HW-D-0034	HW-D-0043	HW-D-0044
HW-D-0054	HW-D-0099	HW-D-0102	HW-D-0136	HW-D-0137	HW-D-0152
HW-D-0194	HW-D-0243	HW-D-0260	HW-D-0485	HW-D-0210	HW-D-0241
HW-D-0242	HW-D-0644	HW-D-0645	HW-D-0646	HW-D-0486	HW-D-0549
HW-D-0642					

TREMCO INC.

HW-D-0016	HW-D-0091
-----------	-----------

UNITED STATES GYPSUM (USG)

HW-D-0160



UL designs only apply to SLT products unless otherwise noted

¹ UL design only applies to SDLT products

² UL design applies to SLT and SDLT products

Contact SCAFCO Engineering Services


For assistance with ordering or questions on your project, call SCAFCO Engineering Services:

Call: 509-789-8669

Email: technical@SCAFECO.com


Track to Structure Connection

The web of the Slotted Deflection Track or Seismic Drift Track is to be attached to the above structure using approved fasteners. The attachment of the track to the structure must be able to withstand the allowable lateral loads applied to the connection. Refer to the allowable lateral loads on pages 7, 9, 11, and 13. Fasteners are to be spaced as required by design, but not more than 24" o.c.

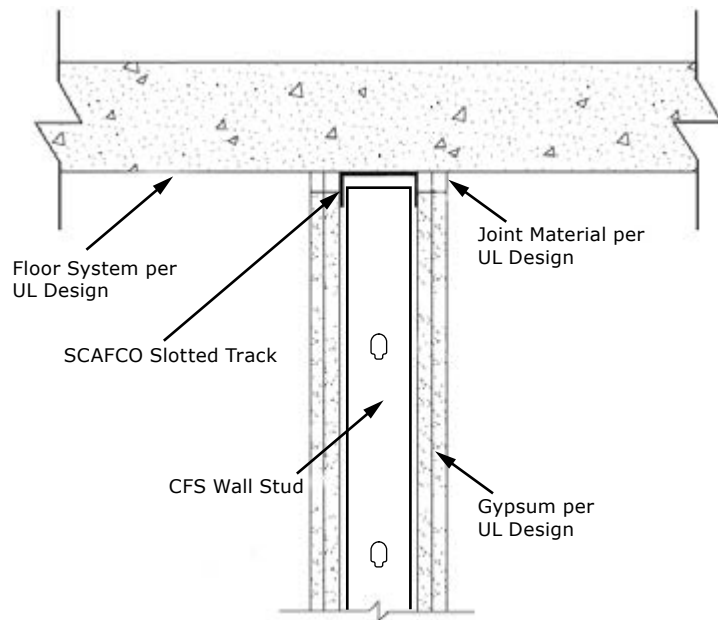


Standard Web Slot Per Track Type


Slotted Leg Track (SLT)

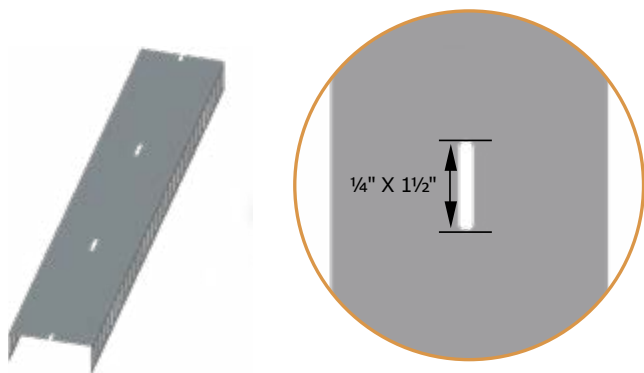


Slotted Deep Leg Track (SDLT)

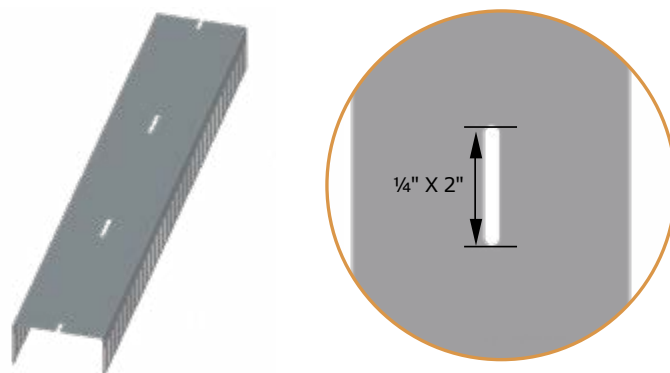

*Seismic Drift Track (D)

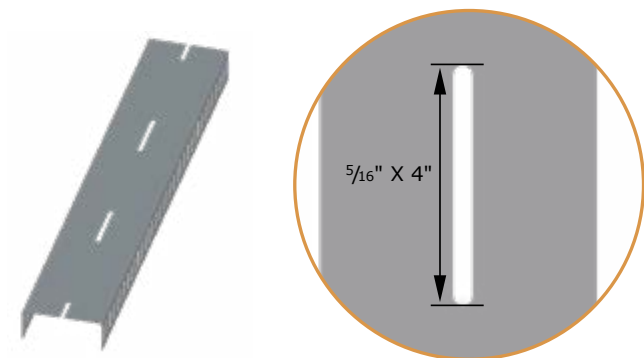

*Seismic Deep Leg Drift Track (DD)

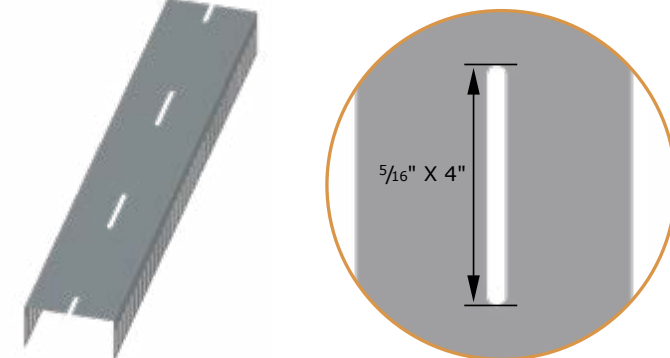


* Drift slot meant for use with DI-68 washers, which are sold separately.

Custom Web Slot Configurations


Examples






Single Slot (SS)

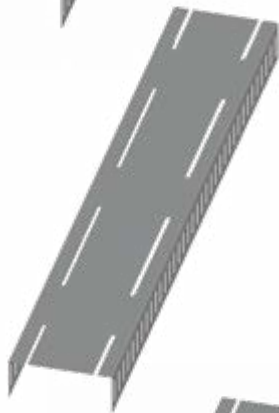

Double Slot (DS)

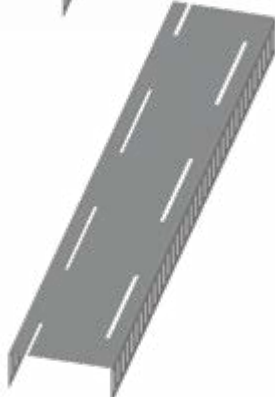


Offset Slot (OS)

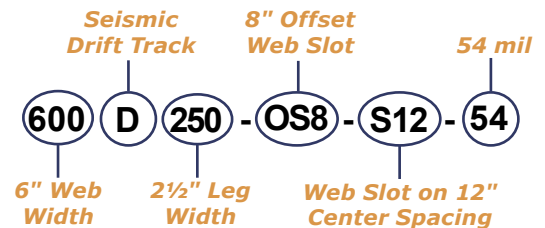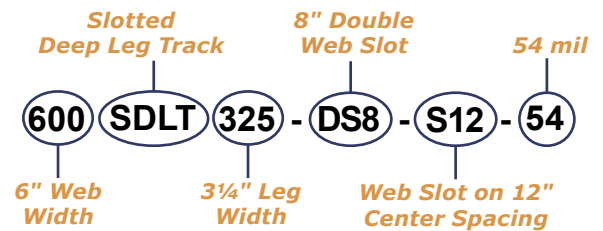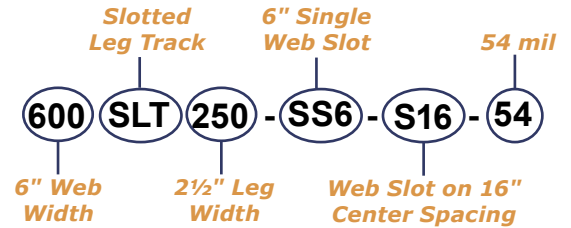

Note: Minimum 1" of material recommended between slots. Slot size cannot exceed slot spacing.


Additional Slotted Track Styles



Slotted Angle



Slotted Rake Track



Slotted Curved Track



Slotted Pitched Track

Note: Additional styles available in both SLT and SDLT. UL Numbers do not apply to the non-standard shapes.


SLT - Standard Slotted Leg Track

The SLT Slotted Deflection Track allows for a positive attachment of the stud to the top track through the slots designed to accommodate the vertical movement of the primary structure, in compliance with Section 713.2 of the IBC.

The SLT is designed to allow a total vertical movement of 1 1/2" (+/- 3/4").

Dimension


The section legs (flanges) are 2 1/2" in length and have 1 1/2" long by 1/4" wide vertical slots spaced every 1" along the length of the member.

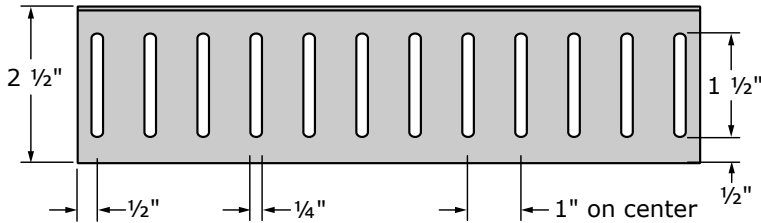


UL Classified for US and Canada
UL File No. R25017




Standard Slotted Leg Track Detail (SLT)

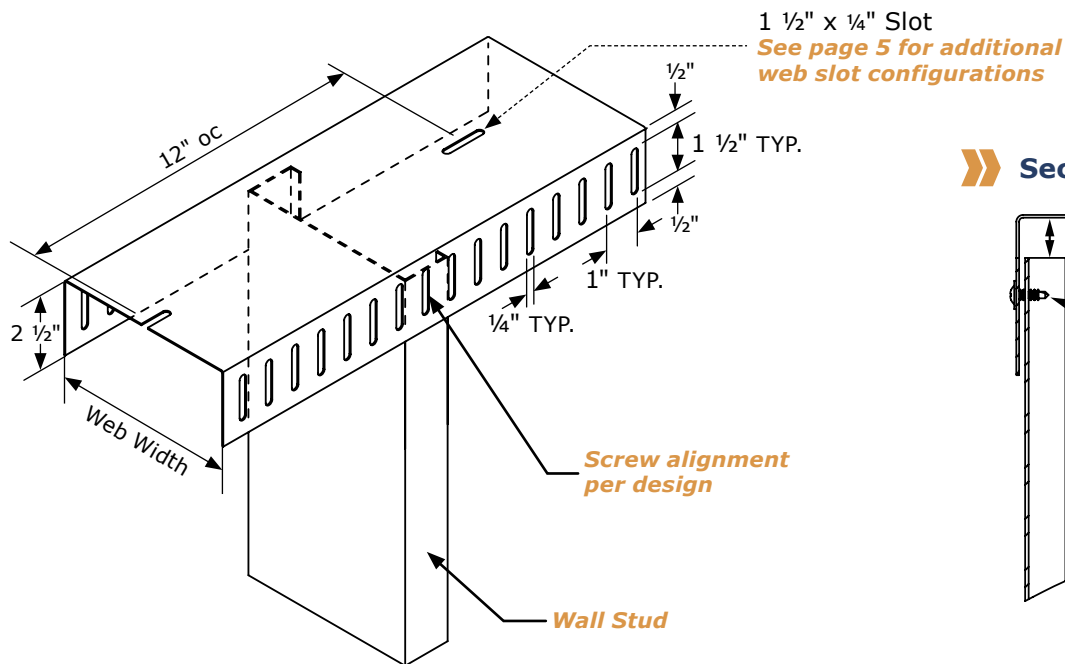

Section View

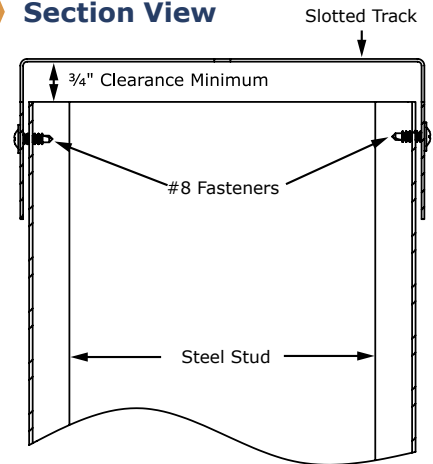

Specifications

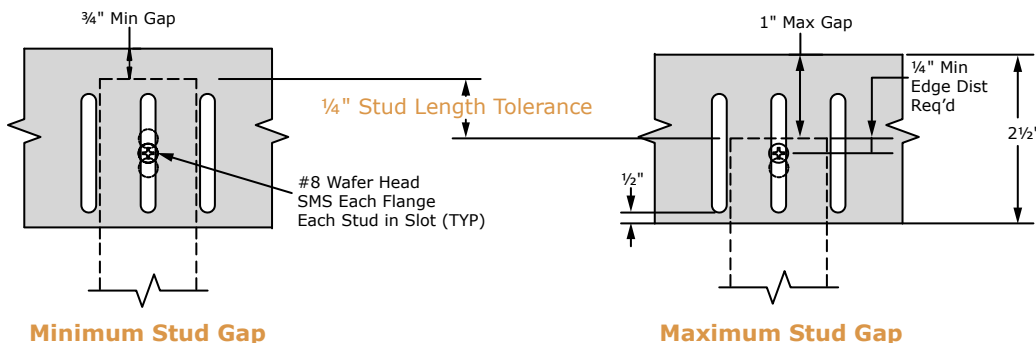

Standard Slotted Leg Track Section Properties

Part No.	F _y (ksi)	Design Thickness (in)	Area (in ²)	Weight (lb/ft)	Gross Properties				Effective Properties		Allowable Lateral Load (lbs)
					I _x (in ⁴)	R _x (in)	I _y (in ⁴)	R _y (in)	S _{xx} (in ³)	I _{xx} (in ⁴)	
250SLT250-D20	57	0.0188	0.141	0.48	0.184	1.141	0.097	0.830	0.032	0.062	37
250SLT250-30EQD	57	0.0235	0.176	0.60	0.230	1.142	0.121	0.829	0.046	0.083	55
250SLT250-33EQS	57	0.0295	0.221	0.75	0.289	1.143	0.152	0.828	0.065	0.110	90
250SLT250-33	33	0.0346	0.259	0.88	0.339	1.144	0.178	0.827	0.087	0.129	106
250SLT250-43EQS	57	0.0400	0.300	1.02	0.393	1.145	0.205	0.826	0.100	0.149	173
250SLT250-43	33	0.0451	0.338	1.15	0.443	1.456	0.230	0.826	0.108	0.163	191
250SLT250-54	50	0.0566	0.424	1.44	0.565	1.155	0.287	0.824	0.141	0.213	379
250SLT250-68	50	0.0713	0.534	1.82	0.728	1.168	0.360	0.821	0.177	0.273	568
250SLT250-97	50	0.1017	0.761	2.59	1.086	1.195	0.506	0.815	0.249	0.399	1257
350SLT250-D20	57	0.0188	0.160	0.54	0.372	1.526	0.109	0.824	0.046	0.129	37
350SLT250-30EQD	57	0.0235	0.200	0.68	0.466	1.527	0.135	0.823	0.067	0.175	55
350SLT250-33EQS	57	0.0295	0.251	0.85	0.585	1.528	0.169	0.822	0.096	0.235	90
350SLT250-33	33	0.0346	0.294	1.00	0.687	1.528	0.198	0.821	0.138	0.286	106
350SLT250-43EQS	57	0.0400	0.340	1.16	0.794	1.529	0.229	0.820	0.153	0.331	173
350SLT250-43	33	0.0451	0.383	1.30	0.896	1.530	0.257	0.819	0.178	0.362	191
350SLT250-54	50	0.0566	0.480	1.63	1.137	1.538	0.321	0.817	0.232	0.471	379
350SLT250-68	50	0.0713	0.605	2.06	1.454	1.550	0.401	0.814	0.290	0.598	568
350SLT250-97	50	0.1017	0.862	2.93	2.139	1.575	0.563	0.808	0.409	0.867	1257
362SLT250-D20	57	0.0188	0.162	0.55	0.401	1.573	0.110	0.823	0.048	0.140	37
362SLT250-30EQD	57	0.0235	0.203	0.69	0.502	1.573	0.137	0.822	0.069	0.190	55
362SLT250-33EQS	57	0.0295	0.254	0.87	0.630	1.574	0.171	0.821	0.100	0.254	90
362SLT250-33	33	0.0346	0.298	1.01	0.740	1.575	0.200	0.820	0.144	0.312	106
362SLT250-43EQS	57	0.0400	0.345	1.17	0.856	1.576	0.231	0.819	0.159	0.359	173
362SLT250-43	33	0.0451	0.389	1.32	0.966	1.577	0.260	0.818	0.188	0.395	191
362SLT250-54	50	0.0566	0.487	1.66	1.224	1.585	0.324	0.816	0.244	0.512	379
362SLT250-68	50	0.0713	0.614	2.09	1.565	1.597	0.406	0.813	0.306	0.650	568
362SLT250-97	50	0.1017	0.875	2.98	2.300	1.621	0.570	0.807	0.432	0.942	1257
400SLT250-D20	57	0.0188	0.169	0.58	0.496	1.712	0.113	0.818	0.053	0.173	37
400SLT250-30EQD	57	0.0235	0.212	0.72	0.620	1.712	0.141	0.817	0.077	0.236	55
400SLT250-33EQS	57	0.0295	0.265	0.90	0.779	1.713	0.177	0.816	0.111	0.317	90
400SLT250-33	33	0.0346	0.311	1.06	0.914	1.714	0.207	0.815	0.162	0.396	106
400SLT250-43EQS	57	0.0400	0.360	1.22	1.058	1.715	0.238	0.814	0.179	0.450	173
400SLT250-43	33	0.0451	0.406	1.38	1.193	1.715	0.268	0.813	0.219	0.502	191
400SLT250-54	50	0.0566	0.509	1.73	1.511	1.723	0.335	0.811	0.284	0.650	379
400SLT250-68	50	0.0713	0.641	2.18	1.928	1.735	0.418	0.808	0.356	0.825	568
400SLT250-97	50	0.1017	0.913	3.11	2.823	1.758	0.587	0.802	0.502	1.192	1257
600SLT250-D20	57	0.0188	0.207	0.70	1.214	2.422	0.128	0.786	0.081	0.420	37
600SLT250-30EQD	57	0.0235	0.259	0.88	1.518	2.423	0.159	0.785	0.118	0.579	55
600SLT250-33EQS	57	0.0295	0.324	1.10	1.906	2.424	0.200	0.784	0.172	0.789	90
600SLT250-33	33	0.0346	0.380	1.29	2.236	2.424	0.233	0.783	0.260	1.021	106
600SLT250-43EQS	57	0.0400	0.440	1.50	2.585	2.425	0.269	0.782	0.283	1.145	173
600SLT250-43	33	0.0451	0.496	1.69	2.916	2.425	0.303	0.781	0.378	1.402	191
600SLT250-54	50	0.0566	0.622	2.12	3.678	2.432	0.377	0.779	0.478	1.769	379
600SLT250-68	50	0.0713	0.783	2.67	4.670	2.442	0.472	0.776	0.655	2.266	568
600SLT250-97	50	0.1017	1.116	3.80	6.767	2.462	0.662	0.770	0.960	3.253	1257
800SLT250-33EQS	57	0.0295	0.383	1.30	3.681	3.098	0.215	0.749	0.233	1.504	90
800SLT250-33	33	0.0346	0.450	1.53	4.318	3.099	0.252	0.748	0.358	1.994	106
800SLT250-43EQS	57	0.0400	0.520	1.77	4.992	3.099	0.290	0.747	0.387	2.216	173
800SLT250-43	33	0.0451	0.586	1.99	5.629	3.100	0.326	0.746	0.530	2.800	191
800SLT250-54	50	0.0566	0.735	2.50	7.090	3.106	0.407	0.744	0.671	3.522	379
800SLT250-68	50	0.0713	0.926	3.15	8.978	3.114	0.509	0.741	0.943	4.675	568
800SLT250-97	50	0.1017	1.320	4.49	12.944	3.132	0.713	0.735	1.536	6.835	1257

Table Notes

- Gross properties based on the full section, not reduced for flange slots.
- Effective properties based on a compression flange of 1/2" (before local buckling reductions) and a tension flange of 1."
- For deflection calculations, use effective I_{xx}.
- All properties based on unpunched webs.
- Web depth is equal to the nominal depth plus two times the design thickness, plus the inside bend radius.
- X-X properties are 'strong-axis' properties. Y-Y properties are about the 'weak-axis.'
- Effective properties based on the "North American Specification for the Design of Cold-Formed Steel Structural Members," AISI S100-07 / S2-10.
- For SI: 1 inch = 25.4 mm, 1 ksi = 6.8948 kPa, 1 lb/ft = 14.594 N/m.



SDLT - Slotted Deep Leg Track

The SDLT Slotted Deep Leg Track allows for a positive attachment of the stud to the top track through the slots designed to accommodate the vertical movement of the primary structure, in compliance with Section 713.2 of the IBC.

The SDLT is designed to allow a total vertical movement of 2" (+/- 1").


Dimension

The section legs (flanges) are 3 1/4" in length and have 2" long by 1/4" wide vertical slots spaced every 1" along the length of the member.

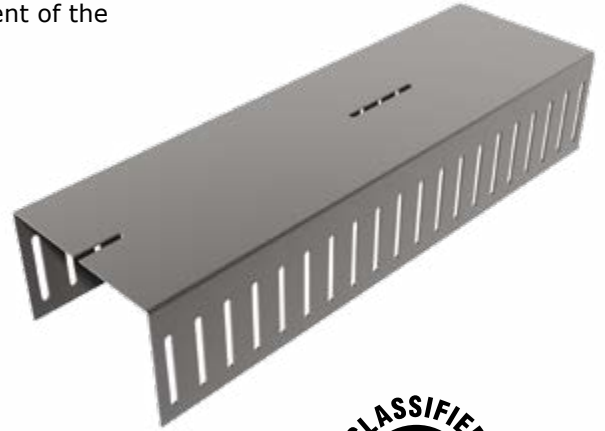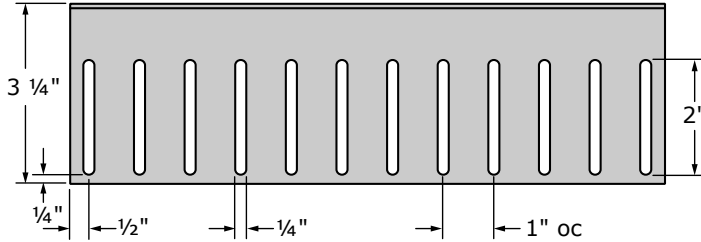


UL Classified for US and Canada
UL File No. R25017


Slotted Deep Leg Track Detail (SDLT)

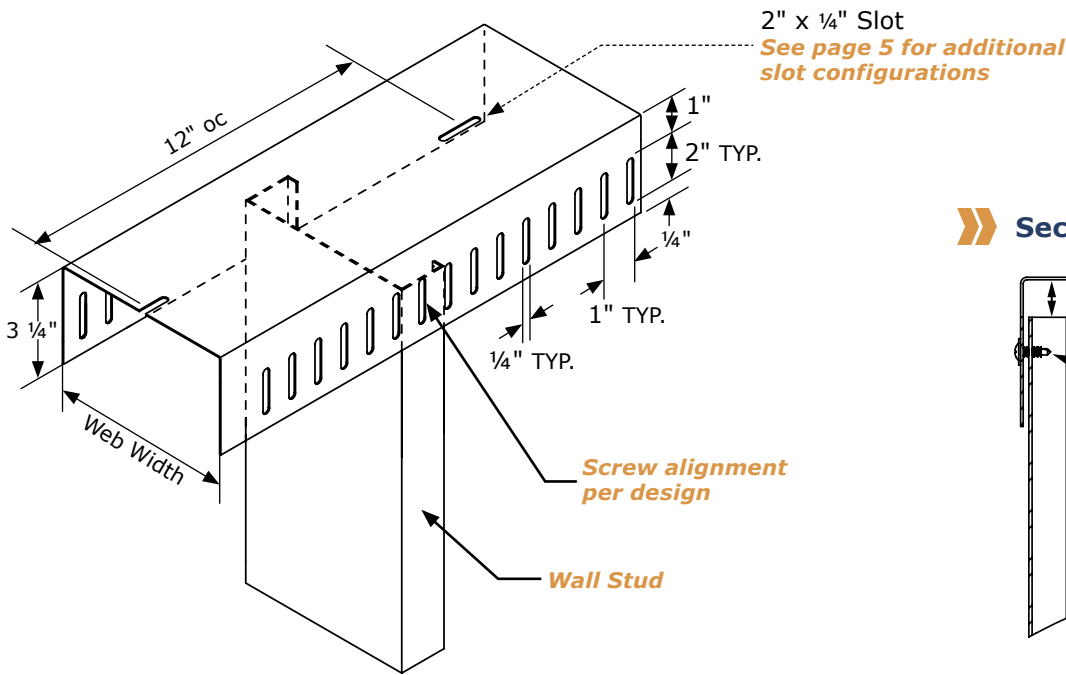

Section View

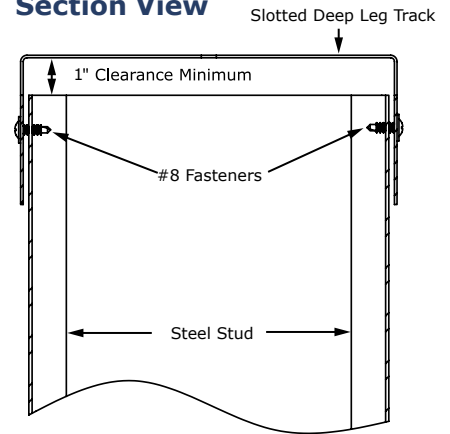

Specifications

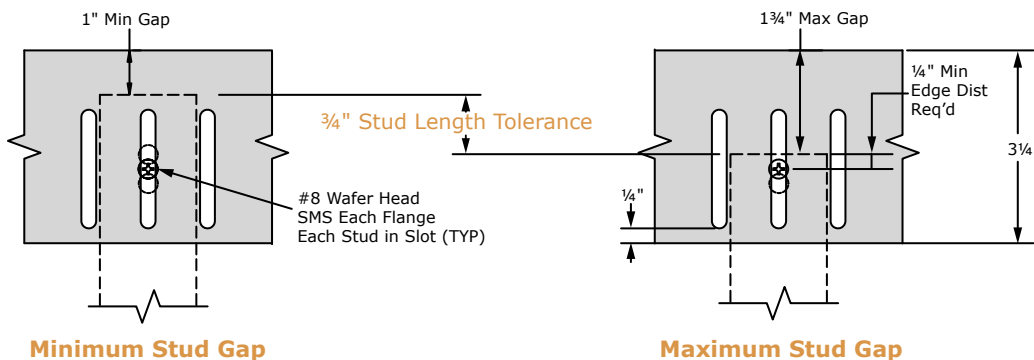

Slotted Deep Leg Track Section Properties

Part No.	F _y (ksi)	Design Thickness (in)	Gross Properties						Effective Properties		Allowable Lateral Load (lbs)
			Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	R _x (in)	I _y (in ⁴)	R _y (in)	S _{xx} (in ³)	I _{xx} (in ⁴)	
250SDLT325-33EQS	57	0.0295	0.265	0.90	0.364	1.171	0.307	1.075	0.075	0.123	35
250SDLT325-33	33	0.0346	0.311	1.06	0.428	1.172	0.359	1.074	0.098	0.157	47
250SDLT325-43EQS	57	0.0400	0.360	1.22	0.495	1.173	0.414	1.073	0.110	0.178	71
250SDLT325-43	33	0.0451	0.406	1.38	0.559	1.174	0.466	1.073	0.133	0.193	92
250SDLT325-54	50	0.0566	0.509	1.73	0.713	1.184	0.583	1.071	0.174	0.263	179
250SDLT325-68	50	0.0713	0.641	2.18	0.920	1.198	0.731	1.068	0.221	0.337	299
250SDLT325-97	50	0.1017	0.913	3.11	1.376	1.227	1.032	1.063	0.314	0.497	707
350SDLT325-33EQS	57	0.0295	0.295	1.00	0.729	1.572	0.343	1.078	0.101	0.263	35
350SDLT325-33	33	0.0346	0.346	1.18	0.856	1.573	0.401	1.077	0.153	0.340	47
350SDLT325-43EQS	57	0.0400	0.400	1.36	0.990	1.574	0.463	1.076	0.165	0.387	71
350SDLT325-43	33	0.0451	0.451	1.53	1.117	1.575	0.521	1.075	0.211	0.419	92
350SDLT325-54	50	0.0566	0.565	1.92	1.418	1.584	0.651	1.073	0.278	0.565	179
350SDLT325-68	50	0.0713	0.712	2.42	1.816	1.597	0.816	1.071	0.352	0.720	299
350SDLT325-97	50	0.1017	1.015	3.45	2.676	1.624	1.151	1.065	0.499	1.047	707
362SDLT325-33EQS	57	0.0295	0.299	1.02	0.785	1.621	0.347	1.077	0.105	0.285	35
362SDLT325-33	33	0.0346	0.350	1.19	0.921	1.622	0.406	1.076	0.160	0.369	47
362SDLT325-43EQS	57	0.0400	0.405	1.38	1.066	1.623	0.468	1.076	0.172	0.421	71
362SDLT325-43	33	0.0451	0.456	1.55	1.203	1.624	0.527	1.075	0.222	0.455	92
362SDLT325-54	50	0.0566	0.572	1.95	1.526	1.633	0.659	1.073	0.292	0.613	179
362SDLT325-68	50	0.0713	0.721	2.45	1.952	1.646	0.825	1.070	0.370	0.780	299
362SDLT325-97	50	0.1017	1.027	3.50	2.873	1.672	1.164	1.064	0.524	1.135	707
400SDLT325-33EQS	57	0.0295	0.310	1.05	0.966	1.766	0.358	1.075	0.117	0.354	35
400SDLT325-33	33	0.0346	0.363	1.24	1.134	1.767	0.419	1.074	0.180	0.466	47
400SDLT325-43EQS	57	0.0400	0.420	1.43	1.311	1.768	0.484	1.073	0.193	0.527	71
400SDLT325-43	33	0.0451	0.473	1.61	1.480	1.768	0.544	1.073	0.256	0.575	92
400SDLT325-54	50	0.0566	0.594	2.02	1.875	1.777	0.680	1.070	0.337	0.773	179
400SDLT325-68	50	0.0713	0.748	2.54	2.395	1.790	0.852	1.068	0.427	0.982	299
400SDLT325-97	50	0.1017	1.066	3.63	3.514	1.816	1.202	1.062	0.604	1.424	707
600SDLT325-33EQS	57	0.0295	0.369	1.25	2.319	2.508	0.407	1.051	0.180	0.873	35
600SDLT325-33	33	0.0346	0.432	1.47	2.720	2.508	0.477	1.050	0.285	1.191	47
600SDLT325-43EQS	57	0.0400	0.500	1.70	3.146	2.509	0.550	1.049	0.303	1.325	71
600SDLT325-43	33	0.0451	0.563	1.92	3.548	2.510	0.619	1.048	0.441	1.561	92
600SDLT325-54	50	0.0566	0.707	2.41	4.479	2.517	0.773	1.046	0.557	2.038	179
600SDLT325-68	50	0.0713	0.890	3.03	5.691	2.528	0.969	1.043	0.761	2.608	299
600SDLT325-97	50	0.1017	1.269	4.32	8.259	2.551	1.365	1.037	1.112	3.752	707
800SDLT325-33EQS	57	0.0295	0.428	1.46	4.409	3.211	0.443	1.018	0.244	1.655	35
800SDLT325-33	33	0.0346	0.502	1.71	5.172	3.211	0.519	1.017	0.391	2.308	47
800SDLT325-43EQS	57	0.0400	0.580	1.97	5.980	3.212	0.598	1.016	0.412	2.550	71
800SDLT325-43	33	0.0451	0.654	2.22	6.743	3.212	0.673	1.015	0.612	3.161	92
800SDLT325-54	50	0.0566	0.820	2.79	8.497	3.219	0.841	1.013	0.775	3.996	179
800SDLT325-68	50	0.0713	1.033	3.51	10.767	3.229	1.053	1.010	1.083	5.269	299
800SDLT325-97	50	0.1017	1.472	5.01	15.542	3.249	1.483	1.004	1.739	7.704	707

Table Notes


- Gross properties based on the full section, not reduced for flange slots
- Effective properties based on a compression flange of 3/4" (before local buckling reductions) and a tension flange of 1-1/2."
- For deflection calculations, use effective I_{xx}.
- All properties based on unpunched webs.
- Web depth is equal to the nominal depth plus two times the design thickness, plus the inside bend radius.
- X-X properties are 'strong-axis' properties. Y-Y properties are about the 'weak-axis.'
- Effective properties based on the "North American Specification for the Design of Cold-Formed Steel Structural Members," AISI S100-07 / S2-10.
- For SI: 1 inch = 25.4 mm, 1 ksi = 6.8948 kPa, 1 lb/ft = 14.594 N/m.

D - Seismic Drift Track


SCAFCO Seismic Drift Track (D) allows for lateral movement of the main building structure, while still accommodating head-of-wall deflection and fire ratings for interior and exterior walls. The Seismic Drift Track comes with an extruded metal insert that aids in the connection of the track to the main structure.

Dimension

The section legs (flanges) are 2 1/2" in length and have 1 1/2" long by 1/4" wide vertical slots spaced every 1" along the length of the member.

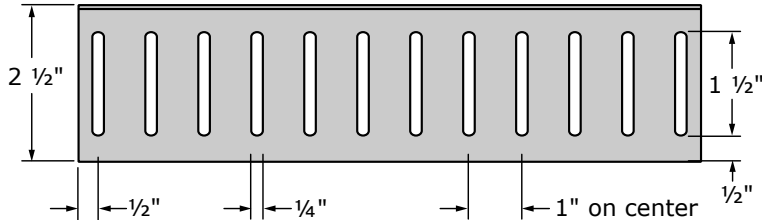

Seismic Drift Track (D)

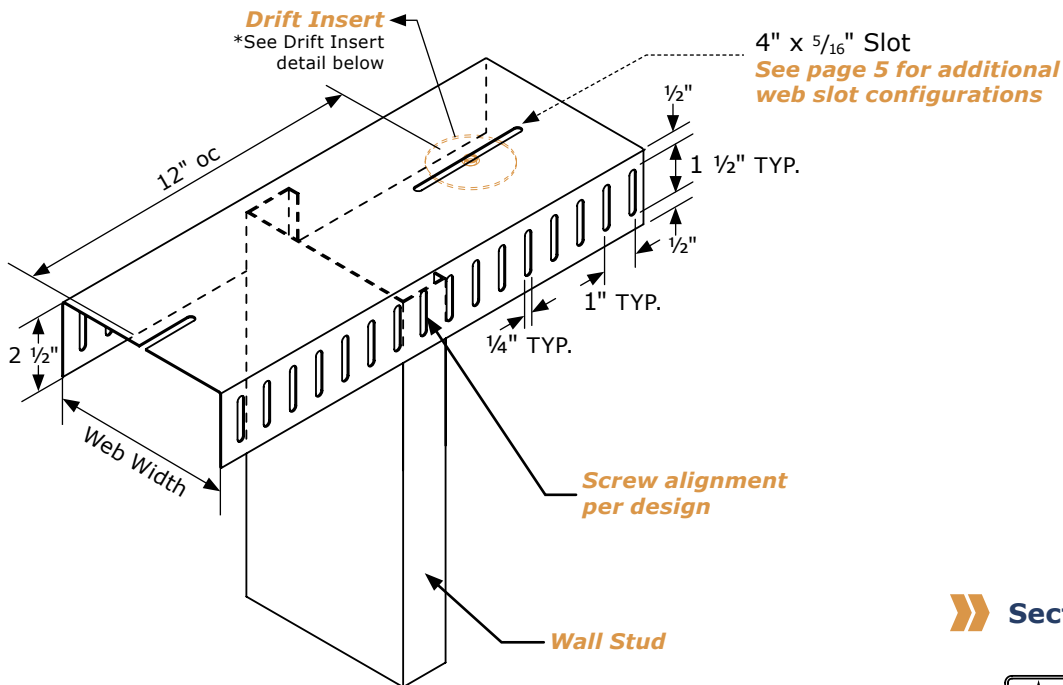


UL Classified for US and Canada
UL File No. R25017




Drift Insert Detail

Part No.
DI-68

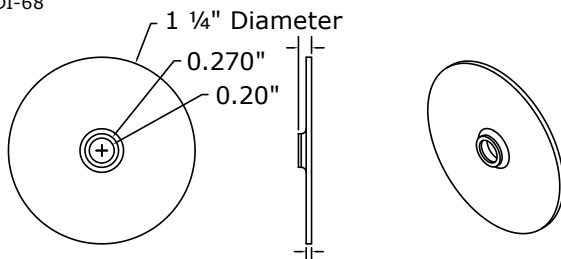

***Sold Separately.**
Spacing determined by design professional.

Section View

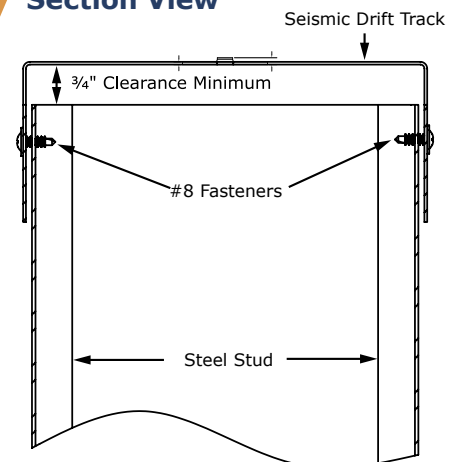

Seismic Drift Track Section Properties

Part No.	F _y (ksi)	Design Thickness (in)	Gross Properties						Effective Properties		Allowable Lateral Load (lbs)
			Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	R _x (in)	I _y (in ⁴)	R _y (in)	S _{xx} (in ³)	I _{xx} (in ⁴)	
250D250-D20	57	0.0188	0.141	0.48	0.184	1.141	0.097	0.830	0.032	0.062	37
250D250-30EQD	57	0.0235	0.176	0.60	0.230	1.142	0.121	0.829	0.046	0.083	55
250D250-33EQS	57	0.0295	0.221	0.75	0.289	1.143	0.152	0.828	0.065	0.110	90
250D250-33	33	0.0346	0.259	0.88	0.339	1.144	0.178	0.827	0.087	0.129	106
250D250-43EQS	57	0.0400	0.300	1.02	0.393	1.145	0.205	0.826	0.100	0.149	173
250D250-43	33	0.0451	0.338	1.15	0.443	1.456	0.230	0.826	0.108	0.163	191
250D250-54	50	0.0566	0.424	1.44	0.565	1.155	0.287	0.824	0.141	0.213	379
250D250-68	50	0.0713	0.534	1.82	0.728	1.168	0.360	0.821	0.177	0.273	568
250D250-97	50	0.1017	0.761	2.59	1.086	1.195	0.506	0.815	0.249	0.399	1257
350D250-D20	57	0.0188	0.160	0.54	0.372	1.526	0.109	0.824	0.046	0.129	37
350D250-30EQD	57	0.0235	0.200	0.68	0.466	1.527	0.135	0.823	0.067	0.175	55
350D250-33EQS	57	0.0295	0.251	0.85	0.585	1.528	0.169	0.822	0.096	0.235	90
350D250-33	33	0.0346	0.294	1.00	0.687	1.528	0.198	0.821	0.138	0.286	106
350D250-43EQS	57	0.0400	0.340	1.16	0.794	1.529	0.229	0.820	0.153	0.331	173
350D250-43	33	0.0451	0.383	1.30	0.896	1.530	0.257	0.819	0.178	0.362	191
350D250-54	50	0.0566	0.480	1.63	1.137	1.538	0.321	0.817	0.232	0.471	379
350D250-68	50	0.0713	0.605	2.06	1.454	1.550	0.401	0.814	0.290	0.598	568
350D250-97	50	0.1017	0.862	2.93	2.139	1.575	0.563	0.808	0.409	0.867	1257
362D250-D20	57	0.0188	0.162	0.55	0.401	1.573	0.110	0.823	0.048	0.140	37
362D250-30EQD	57	0.0235	0.203	0.69	0.502	1.573	0.137	0.822	0.069	0.190	55
362D250-33EQS	57	0.0295	0.254	0.87	0.630	1.574	0.171	0.821	0.100	0.254	90
362D250-33	33	0.0346	0.298	1.01	0.740	1.575	0.200	0.820	0.144	0.312	106
362D250-43EQS	57	0.0400	0.345	1.17	0.856	1.576	0.231	0.819	0.159	0.359	173
362D250-43	33	0.0451	0.389	1.32	0.966	1.577	0.260	0.818	0.188	0.395	191
362D250-54	50	0.0566	0.487	1.66	1.224	1.585	0.324	0.816	0.244	0.512	379
362D250-68	50	0.0713	0.614	2.09	1.565	1.597	0.406	0.813	0.306	0.650	568
362D250-97	50	0.1017	0.875	2.98	2.300	1.621	0.570	0.807	0.432	0.942	1257
400D250-D20	57	0.0188	0.169	0.58	0.496	1.712	0.113	0.818	0.053	0.173	37
400D250-30EQD	57	0.0235	0.212	0.72	0.620	1.712	0.141	0.817	0.077	0.236	55
400D250-33EQS	57	0.0295	0.265	0.90	0.779	1.713	0.177	0.816	0.111	0.317	90
400D250-33	33	0.0346	0.311	1.06	0.914	1.714	0.207	0.815	0.162	0.396	106
400D250-43EQS	57	0.0400	0.360	1.22	1.058	1.715	0.238	0.814	0.179	0.450	173
400D250-43	33	0.0451	0.406	1.38	1.193	1.715	0.268	0.813	0.219	0.502	191
400D250-54	50	0.0566	0.509	1.73	1.511	1.723	0.335	0.811	0.284	0.650	379
400D250-68	50	0.0713	0.641	2.18	1.928	1.735	0.418	0.808	0.356	0.825	568
400D250-97	50	0.1017	0.913	3.11	2.823	1.758	0.587	0.802	0.502	1.192	1257
600D250-D20	57	0.0188	0.207	0.70	1.214	2.422	0.128	0.786	0.081	0.420	37
600D250-30EQD	57	0.0235	0.259	0.88	1.518	2.423	0.159	0.785	0.118	0.579	55
600D250-33EQS	57	0.0295	0.324	1.10	1.906	2.424	0.200	0.784	0.172	0.789	90
600D250-33	33	0.0346	0.380	1.29	2.236	2.424	0.233	0.783	0.260	1.021	106
600D250-43EQS	57	0.0400	0.440	1.50	2.585	2.425	0.269	0.782	0.283	1.145	173
600D250-43	33	0.0451	0.496	1.69	2.916	2.425	0.303	0.781	0.378	1.402	191
600D250-54	50	0.0566	0.622	2.12	3.678	2.432	0.377	0.779	0.478	1.769	379
600D250-68	50	0.0713	0.783	2.67	4.670	2.442	0.472	0.776	0.655	2.266	568
600D250-97	50	0.1017	1.116	3.80	6.767	2.462	0.662	0.770	0.960	3.253	1257
800D250-33EQS	57	0.0295	0.383	1.30	3.681	3.098	0.215	0.749	0.233	1.504	90
800D250-33	33	0.0346	0.450	1.53	4.318	3.099	0.252	0.748	0.358	1.994	106
800D250-43EQS	57	0.0400	0.520	1.77	4.992	3.099	0.290	0.747	0.387	2.216	173
800D250-43	33	0.0451	0.586	1.99	5.629	3.100	0.326	0.746	0.530	2.800	191
800D250-54	50	0.0566	0.735	2.50	7.090	3.106	0.407	0.744	0.671	3.522	379
800D250-68	50	0.0713	0.926	3.15	8.978	3.114	0.509	0.741	0.943	4.675	568
800D250-97	50	0.1017	1.320	4.49	12.944	3.132	0.713	0.735	1.536	6.835	1257

Table Notes


- Gross properties based on the full section, not reduced for flange slots
- Effective properties based on a compression flange of 1/2" (before local buckling reductions) and a tension flange of 1."
- For deflection calculations, use effective I_{xx}.
- All properties based on unpunched webs.
- Web depth is equal to the nominal depth plus two times the design thickness, plus the inside bend radius.
- X-X properties are 'strong-axis' properties. Y-Y properties are about the 'weak-axis.'
- Effective properties based on the "North American Specification for the Design of Cold-Formed Steel Structural Members," AISI S100-07 / S2-10.
- For SI: 1 inch = 25.4 mm, 1 ksi = 6.8948 kPa, 1 lb/ft = 14.594 N/m.

DD - Deep Leg Seismic Drift Track


SCAFCO Deep Leg Seismic Drift Track (DD) allows for lateral movement of the main building structure, while still accomodating head-of-wall deflection and fire ratings for interior and exterior walls. The Deep Leg Seismic Drift Track comes with an extruded metal insert that aids in the connection of the track to the main structure.

Dimension

The section legs (flanges) are 3 1/4" in length and have 2" long by 1/4" wide vertical slots spaced every 1" along the length of the member.

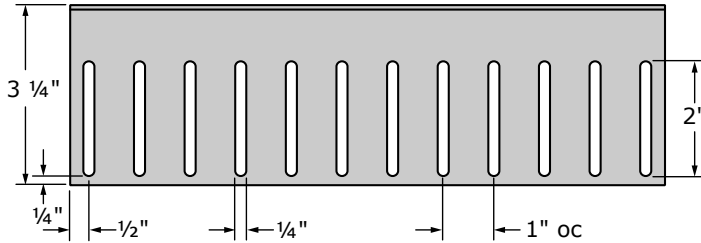

Deep Leg Seismic Drift Track (DD)

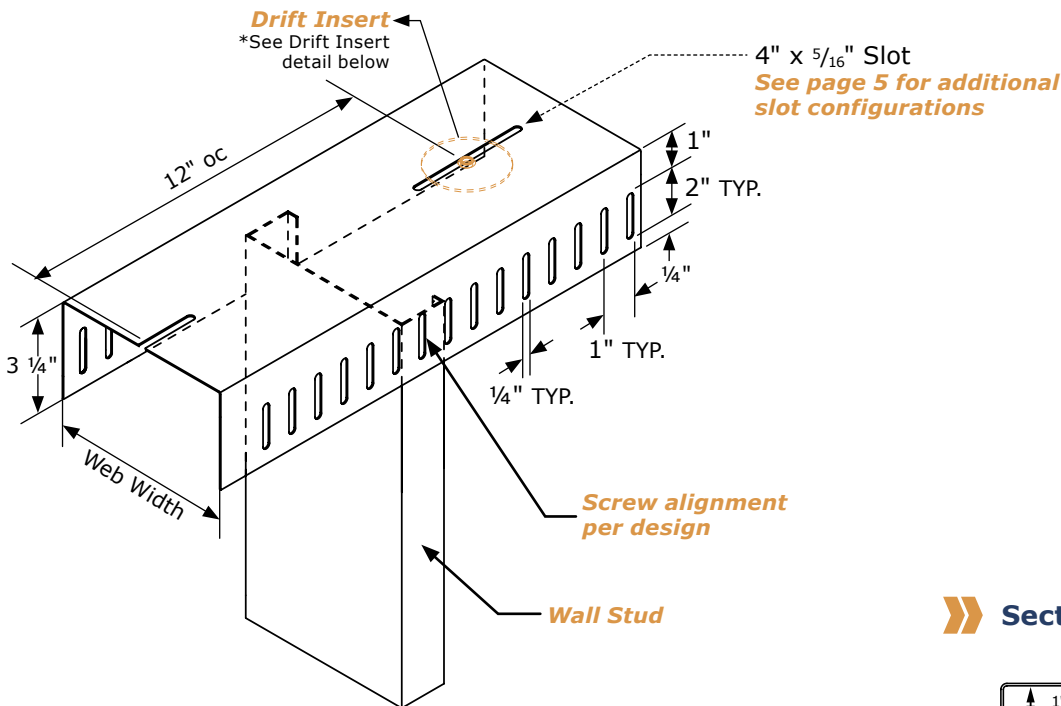


UL Classified for US and Canada
UL File No. R25017




Drift Insert Detail

Part No.
DI-68

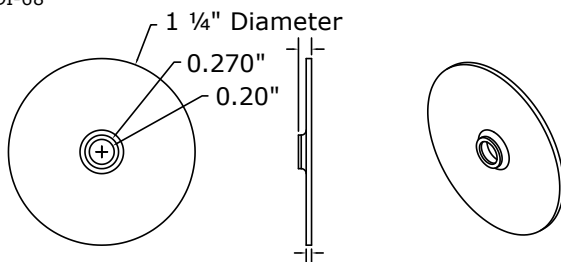

***Sold Separately.**
Spacing determined by design professional.

Section View

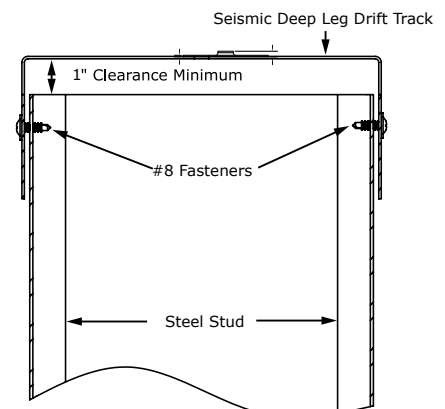

Deep Leg Seismic Drift Track Section Properties

Part No.	F _y (ksi)	Design Thickness (in)	Gross Properties						Effective Properties		Allowable Lateral Load (lbs)
			Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	R _x (in)	I _y (in ⁴)	R _y (in)	S _{xx} (in ³)	I _{xx} (in ⁴)	
250DD325-33EQS	57	0.0295	0.265	0.90	0.364	1.171	0.307	1.075	0.075	0.123	35
250DD325-33	33	0.0346	0.311	1.06	0.428	1.172	0.359	1.074	0.098	0.157	47
250DD325-43EQS	57	0.0400	0.360	1.22	0.495	1.173	0.414	1.073	0.110	0.178	71
250DD325-43	33	0.0451	0.406	1.38	0.559	1.174	0.466	1.073	0.133	0.193	92
250DD325-54	50	0.0566	0.509	1.73	0.713	1.184	0.583	1.071	0.174	0.263	179
250DD325-68	50	0.0713	0.641	2.18	0.920	1.198	0.731	1.068	0.221	0.337	299
250DD325-97	50	0.1017	0.913	3.11	1.376	1.227	1.032	1.063	0.314	0.497	707
350DD325-33EQS	57	0.0295	0.295	1.00	0.729	1.572	0.343	1.078	0.101	0.263	35
350DD325-33	33	0.0346	0.346	1.18	0.856	1.573	0.401	1.077	0.153	0.340	47
350DD325-43EQS	57	0.0400	0.400	1.36	0.990	1.574	0.463	1.076	0.165	0.387	71
350DD325-43	33	0.0451	0.451	1.53	1.117	1.575	0.521	1.075	0.211	0.419	92
350DD325-54	50	0.0566	0.565	1.92	1.418	1.584	0.651	1.073	0.278	0.565	179
350DD325-68	50	0.0713	0.712	2.42	1.816	1.597	0.816	1.071	0.352	0.720	299
350DD325-97	50	0.1017	1.015	3.45	2.676	1.624	1.151	1.065	0.499	1.047	707
362DD325-33EQS	57	0.0295	0.299	1.02	0.785	1.621	0.347	1.077	0.105	0.285	35
362DD325-33	33	0.0346	0.350	1.19	0.921	1.622	0.406	1.076	0.160	0.369	47
362DD325-43EQS	57	0.0400	0.405	1.38	1.066	1.623	0.468	1.076	0.172	0.421	71
362DD325-43	33	0.0451	0.456	1.55	1.203	1.624	0.527	1.075	0.222	0.455	92
362DD325-54	50	0.0566	0.572	1.95	1.526	1.633	0.659	1.073	0.292	0.613	179
362DD325-68	50	0.0713	0.721	2.45	1.952	1.646	0.825	1.070	0.370	0.780	299
362DD325-97	50	0.1017	1.027	3.50	2.873	1.672	1.164	1.064	0.524	1.135	707
400DD325-33EQS	57	0.0295	0.310	1.05	0.966	1.766	0.358	1.075	0.117	0.354	35
400DD325-33	33	0.0346	0.363	1.24	1.134	1.767	0.419	1.074	0.180	0.466	47
400DD325-43EQS	57	0.0400	0.420	1.43	1.311	1.768	0.484	1.073	0.193	0.527	71
400DD325-43	33	0.0451	0.473	1.61	1.480	1.768	0.544	1.073	0.256	0.575	92
400DD325-54	50	0.0566	0.594	2.02	1.875	1.777	0.680	1.070	0.337	0.773	179
400DD325-68	50	0.0713	0.748	2.54	2.395	1.790	0.852	1.068	0.427	0.982	299
400DD325-97	50	0.1017	1.066	3.63	3.514	1.816	1.202	1.062	0.604	1.424	707
600DD325-33EQS	57	0.0295	0.369	1.25	2.319	2.508	0.407	1.051	0.180	0.873	35
600DD325-33	33	0.0346	0.432	1.47	2.720	2.508	0.477	1.050	0.285	1.191	47
600DD325-43EQS	57	0.0400	0.500	1.70	3.146	2.509	0.550	1.049	0.303	1.325	71
600DD325-43	33	0.0451	0.563	1.92	3.548	2.510	0.619	1.048	0.441	1.561	92
600DD325-54	50	0.0566	0.707	2.41	4.479	2.517	0.773	1.046	0.557	2.038	179
600DD325-68	50	0.0713	0.890	3.03	5.691	2.528	0.969	1.043	0.761	2.608	299
600DD325-97	50	0.1017	1.269	4.32	8.259	2.551	1.365	1.037	1.112	3.752	707
800DD325-33EQS	57	0.0295	0.428	1.46	4.409	3.211	0.443	1.018	0.244	1.655	35
800DD325-33	33	0.0346	0.502	1.71	5.172	3.211	0.519	1.017	0.391	2.308	47
800DD325-43EQS	57	0.0400	0.580	1.97	5.980	3.212	0.598	1.016	0.412	2.550	71
800DD325-43	33	0.0451	0.654	2.22	6.743	3.212	0.673	1.015	0.612	3.161	92
800DD325-54	50	0.0566	0.820	2.79	8.497	3.219	0.841	1.013	0.775	3.996	179
800DD325-68	50	0.0713	1.033	3.51	10.767	3.229	1.053	1.010	1.083	5.269	299
800DD325-97	50	0.1017	1.472	5.01	15.542	3.249	1.483	1.004	1.739	7.704	707


Table Notes

- Gross properties based on the full section, not reduced for flange slots
- Effective properties based on a compression flange of 3/4" (before local buckling reductions) and a tension flange of 1-1/2."
- For deflection calculations, use effective I_{xx}.
- All properties based on unpunched webs.
- Web depth is equal to the nominal depth plus two times the design thickness, plus the inside bend radius.
- X-X properties are 'strong-axis' properties. Y-Y properties are about the 'weak-axis.'
- Effective properties based on the "North American Specification for the Design of Cold-Formed Steel Structural Members," AISI S100-07 / S2-10.
- For SI: 1 inch = 25.4 mm, 1 ksi = 6.8948 kPa, 1 lb/ft = 14.594 N/m.

UL Head-of-Wall Joint Systems Design Numbers

With Slotted Track

HW-D-0476	HW-D-0570	HW-D-0599
HW-D-0480	HW-D-0584	HW-D-0602
HW-D-0525	HW-D-0586	HW-D-0622
HW-D-0563	HW-D-0598	HW-D-0623

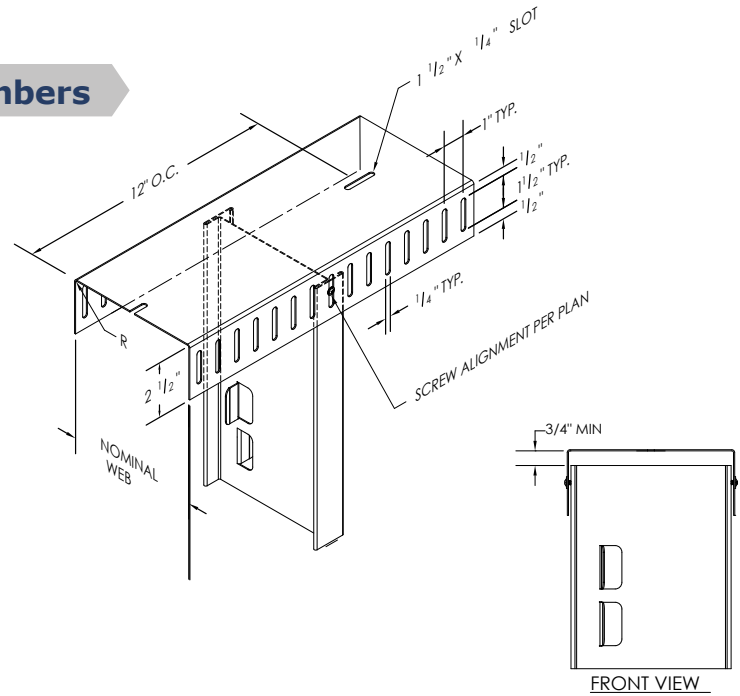

I-STUD SHAFTWALL SYSTEM WITH SLOTTED TRACK



UL Classified for US and Canada *UL Evaluation Report No. ER3660-02*
 UL Underwriters Laboratories Supreme Framing Classification
 UL 263 (ASTM E119, CAN/ULC-S101) Fire Tests of Building Construction and Materials

Product Application and Benefits

TTDS track-in-track deflection system is a two-piece assembly that accommodates deflection of exterior curtain walls and interior partition walls. The outer track is custom-made with a deeper leg and wider web width typically installed to the underside of the floor or roof deck. A pre-constructed wall assembly slides into the deep leg track, and is designed to allow a gap at the top for deflection. The track-in-track assembly cannot be used in axial load-bearing conditions or above continuous window/header spandrels.


2" Leg
Outer Track

2 1/2" Leg
Inner Track


Features and Benefits

- Standard track-in-track deflection system allows up to 1" of vertical movement
- Absorbs head-of-wall and floor extension or compression movement
- Available in custom widths and thicknesses

Track-in-Track Types



Standard Track-in-Track




Track-in-Pitch Track


Specify P° when ordering
Example: 612T250-33-P

Additional Deflection Applications

PLC4

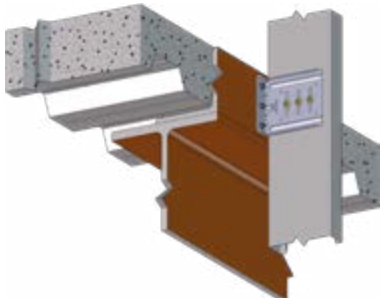


DPLC2

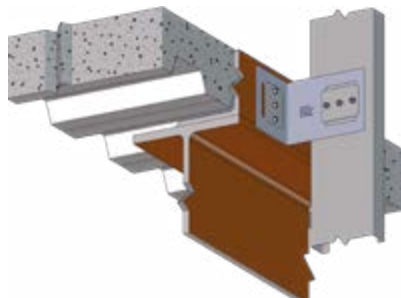

ESC



PLS3



SCAFCO Steel Framing

With 60 years of manufacturing experience, SCAFCO has gained a worldwide reputation for high-quality products, great customer service, and strong corporate ethics. Our comprehensive team of engineers, administrative and office staff, and craftsmen, focus on providing customer driven products. We currently have manufacturing facilities in Spokane, WA and Stockton, CA. We also feature press brakes and shears capable of making on demand, custom parts up to 24' in length.

Engineering Services

For assistance with ordering or questions on your project, utilize SCAFCO Engineering Services:

Call: 509-789-8669

Email: Technical@SCAFCO.com

MANUFACTURING LOCATIONS



17-12 Slotted Track_SCAFCO

www.SCAFCO.com



SLTLIT10000118